

TILE STOVE INSERTS FROM BRUNNER







HKD 6.1

State: 2018-05-22







BRUNNER[®]
made in germany.

Dimension sheets - HKD 6.1

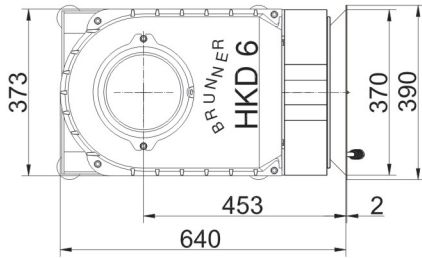
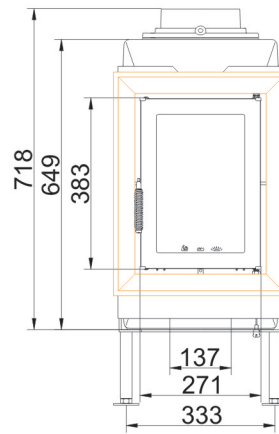
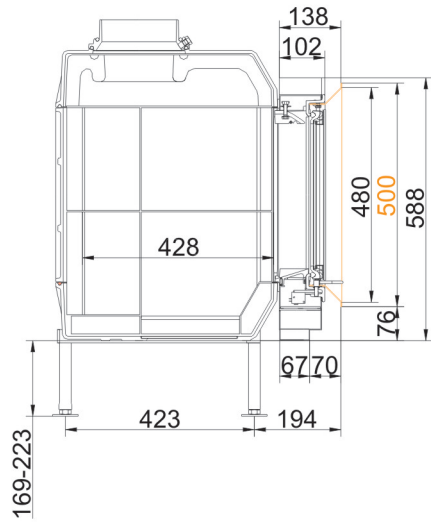


... with steel door frame

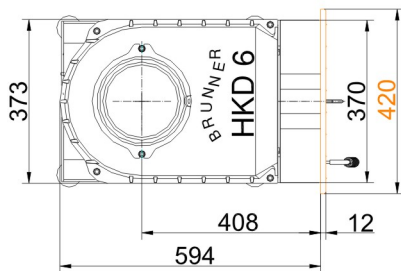
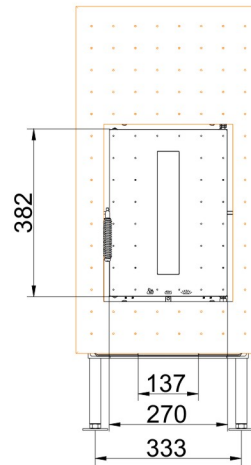
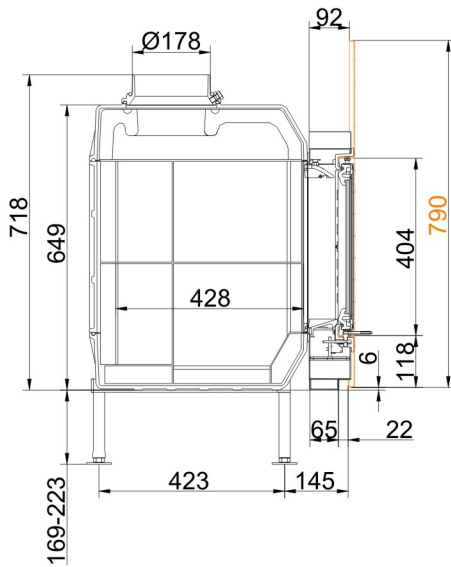


... with steel front plate 790 x 420

Dimension sheets - HKD 6.1


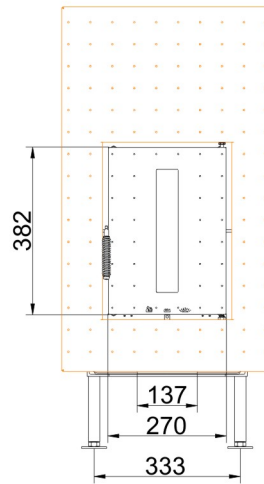
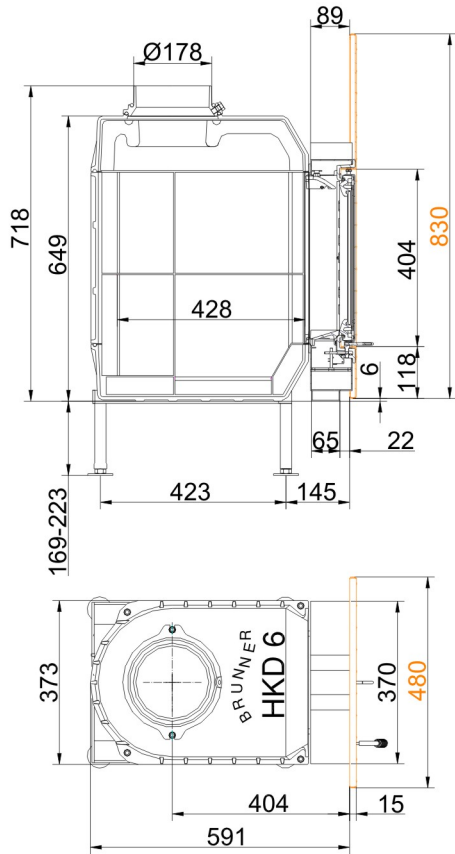


... with steel front plate 830 x 480


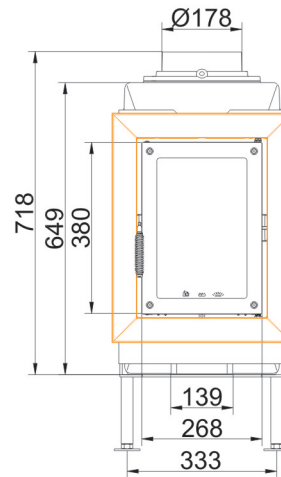
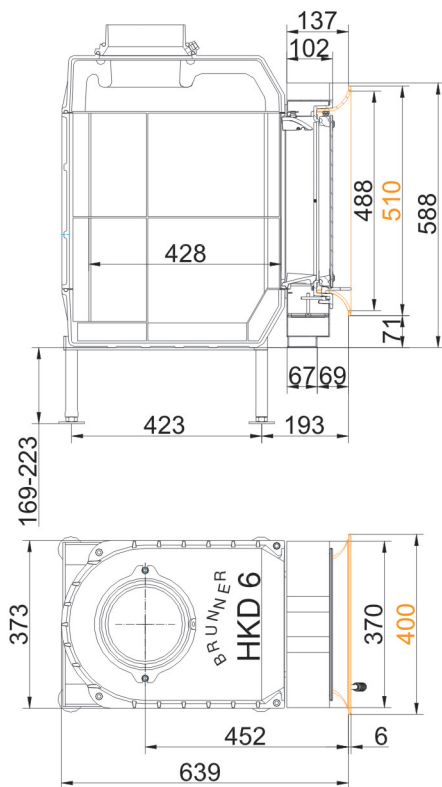


... with cast iron frame

Dimension sheets - HKD 6.1

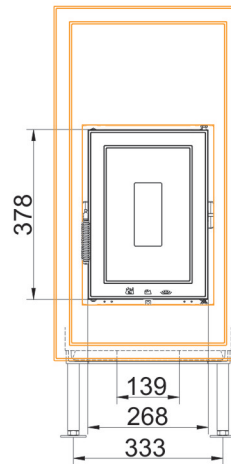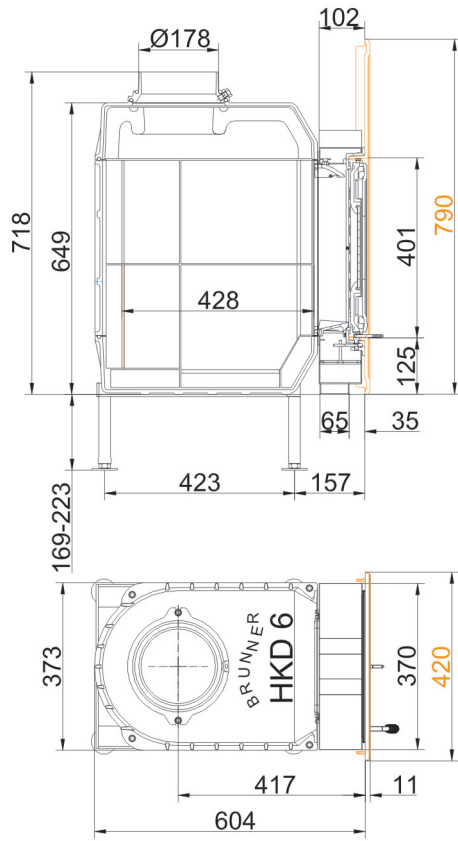


... cast iron front plate 790 x 420

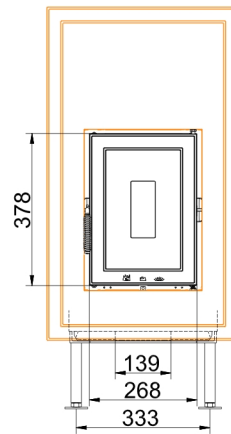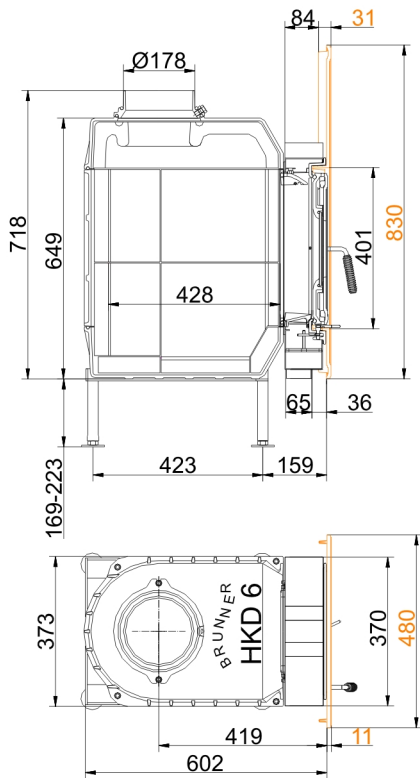

... cast iron front plate 830 X 480

Dimension sheets - HKD 6.1

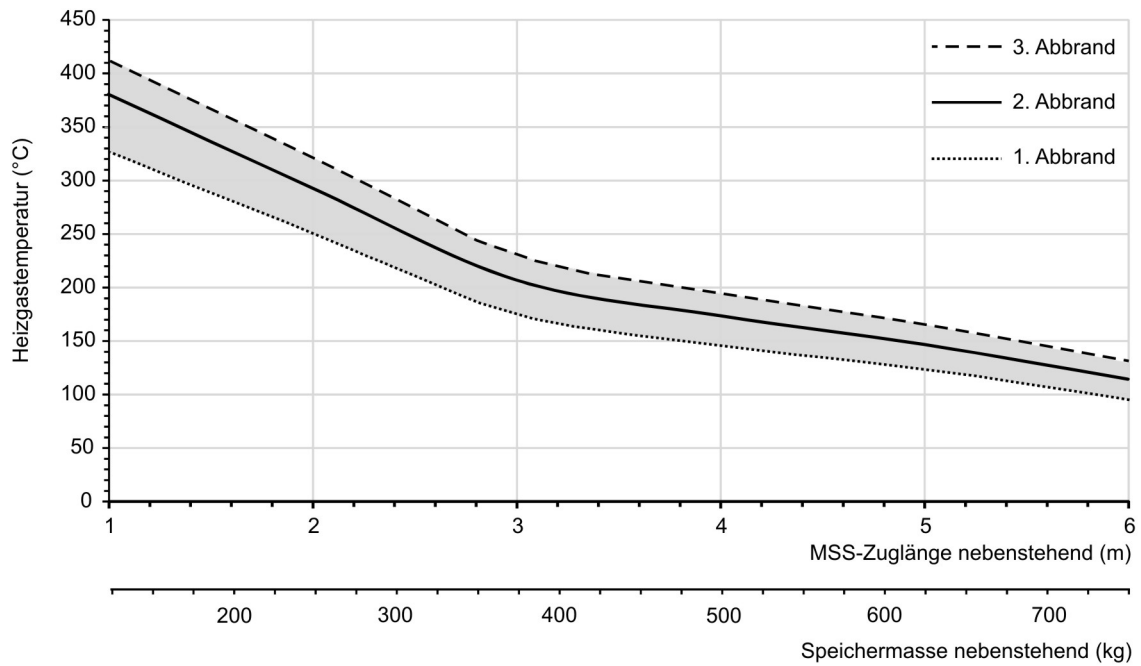

Design characteristics for adjacent storage mass

We suggest for CAD planing Palette CAD. Permanent updated drawings: www.brunner.de
Frames / front versions are marked colored.

Planning and installation - HKD 6.1

Tested according to		EN 13229 W	EN 13229 WA
Values measured at		Rated capacity	Accumulation
Suitable for all construction types according to rules		OK	OK
EEl		118.7	118.7
Data for functional demonstration			
Rated heat power	kW	9	-
Fire wood volume	kg/h	2.2	4.2
Combustion performance	kW	10	19
Flue gas mass flow	g/s	10	16
Outlet temperature (before heating surface)	°C	510	600
Flue gas temperature after:			
1 x adjoining cast iron radiator (GNF 8/10)	°C	140	170
6 x accumulation rings (MAS) ¹⁾	°C	200	-
4,1 m ceramic accumulator ²⁾	°C	-	180
2,8 m accumulation stones (MSS) ²⁾	°C	-	215
Necessary supply pressure	Pa	12	15
Combustion air consumption	m ³ /h	30	50
Combustion air connection Ø	mm	125	125
Heat distribution			
Insert / heat accumulator	%	40 / 50	40 / 50
Glass pane (single / double)	%	- / 10	- / 10
Cross-section of gratings ³⁾			
Convection air	cm ²	400 / 250 / 550	400 / 250 / 550
Supply air	cm ²	400 / 250 / 550	400 / 250 / 550
Minimal distances of the fireplace			
to insulation layer	cm	8	8
to mounting floor	cm	15	15
Thermal insulation without / with air gratings ⁴⁾			
Mounting wall	cm	16 / 12	16 / 12
Floor	cm	0	0
Ceiling	cm	28 / 21	28 / 21
Brick lining for combustible wall	cm	10	10
Weight			
Fireplace / combustion chamber	kg	91 / 55	
Meets requirement/limit values for:			
Germany/ Austria / Suisse / Norway	1.BImSchV (Stufe 2) / 15a BvG (2015) / LRV / -		

1) Damper flap recommended

2) Approximate value. Determination according to design characteristics for adjacent storage mass or proof of function provided by calculation

3) for fireplace inserts / flue gas pipe / metallic reheating surface

4) Values determined with upper air sections; stove cladding is heat emitting.